


Our Product



- Consumes less than 0.50 watt
- Workable at 110V AC/DC (Range is 60V to 150V)
- Non-polarity specific connection

Special Features....

- In built EMI and RFI noise suppression circuit
- Heat generation stabilized within 50 deg Celsius after continuous operation of 24 hours.
- Maintains Constant Lux level even in voltage variations within the range.

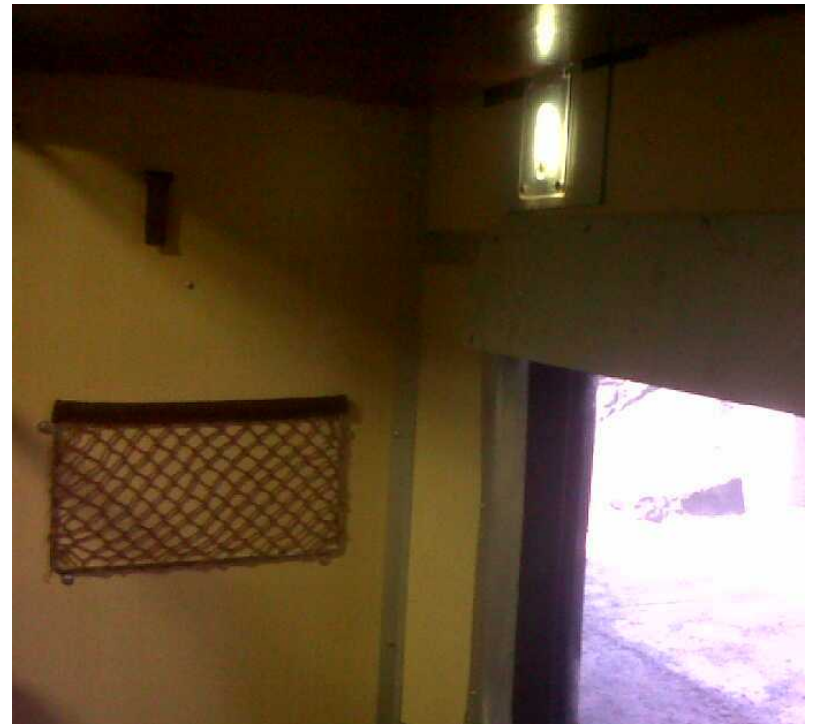

Special Features....



- We use LED from reputed manufacturers like NICHIA, SEOUL, LUMILED in White color of wavelength of 0.31,0.31 nm.
- All electronic parts are used from reputed and standard companies.

Special Features....

- Electromechanical ON/OFF switch of reputed make with operation life of over 100,000 operations.
- Plastic Body made from FR Grade Lexan Poly Carbonate and Cycloy raw materials.

