


Classical V - Belts

Banded belts

Belts with Kevlar Cord

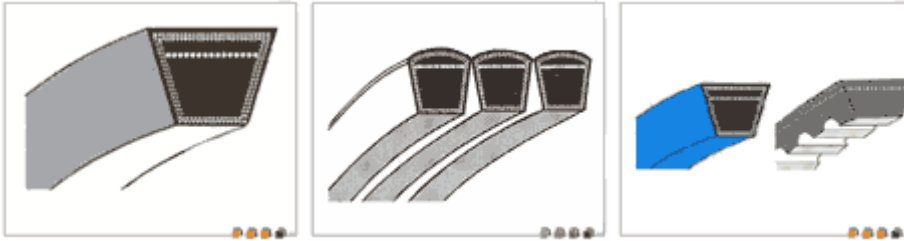

Sections :

8, Z, M, A, B, 20, C, 25, D,E,

Sections :

8, Z, M, A, B, 20, C, 25, D,E,



Sections :

8, Z, M, A, B, 20, C, 25, D,E,

Wedge V - Belts

Wedge V - Belt

High Capacity Narrow V Vee - Belts

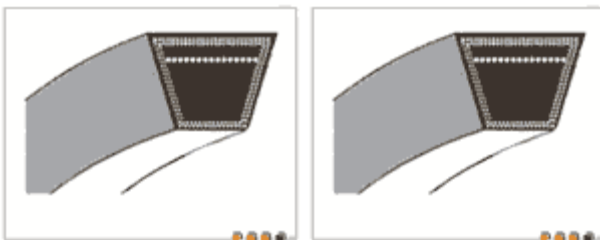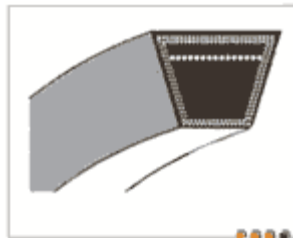

Sections: SPZ, SPA, SPB, 19, SPC


Sections : 3V, 5V, 8V

Sections : 3V, 5V, 8V

Profile Top Belts

Profile Top Belt

Profile Top Belts

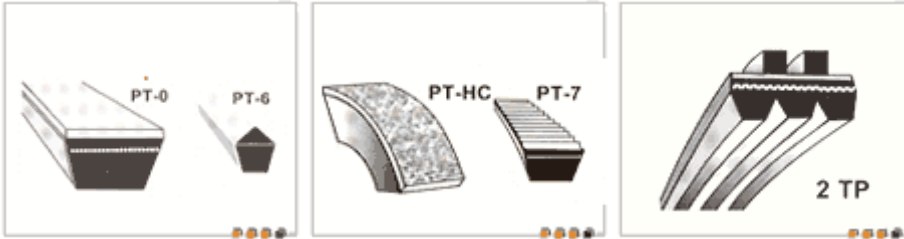

Sections : B Sections : B,C
Sections: B,C Sections: 37 45, D
Sections : 3HSPB

Hexagonal Belts

Vari Speed Belts

Light Duty Belts



Sections: SPZ, SPA, SPB, 19, SPC
Sections : 15, 17, 19, 21, 25, 30, 32, 36, 38, 40, 45, 50 ,55, 60
Sections: 3L, 4L, 5L

Classical Cut Edge Belts

Wedge Cut Edge Belt

Narrow Cut Edge Belt



Sections: ZX, AX, BX, CX
Sections: XPZ, XPA, XPB, XPC
Sections: 3VX, 5VX, 8VX

Banded Cut Edge Belts

Ribbed Belts

AOH V-Belts (Antistatic Oil & Heat Resistant) :



Sections: HAX, HBX, HXPZ, HXPA, HXPB, H3VX, H5VX, H5VX-10, HAX-13
Sections: PH, PJ, PK, PL, PM
Series : All sections of classical Wedge & Narrow V- Belts.

Fire Resistant Antistatic Belts



Series : All sections of Classical Wedge & Narrow V-Belts

Hose with One & Two Wire Braidings confirming to :

- DIN 20022 □ SAE 100 R1AT □ IS 9573
- EN 853 □ SAE 100 R2AT □ IS 446
- SAE 100 R1A □ BCS 174 □ EN 857 2SC
- SAE 100 R2A □ BS 5342 □ EN 857

X'el 100A
WITH ONE WIRE BRAID



Nominal Bore (Inch) :
1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el STEAM-HOSE
TYPE-1A WITH ONE WIRE BRAID



Available in ID –
1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el HOT WATER HOSE
WITH ONE WIRE BRAID



Available in ID –
1/4, 5/16, 3/8, 1/2

X'el 200A
WITH TWO WIRE BRAIDS



Available in ID –
1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el STEAM-HOSE
TYPE-2A WITH TWO WIRE BRAIDS



Available in ID –
1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el HOT WATER HOSE
WITH TWO WIRE BRAIDS



Available in ID –
1/4, 5/16, 3/8, 1/2

X'el 100AT
WITH ONE WIRE BRAID



Available in ID –
1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el LPG HOSE
WITH ONE WIRE BRAID



Available in ID –
5/16, 5/8, 3/4

X'el 2SC COMPACT HOT WATER HOSE
WITH TWO WIRE BRAIDS



Available in ID –
1/4, 5/16, 3/8, 1/2

X'el 200AT
WITH TWO WIRE BRAIDS



Available in ID –
1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el KRISHI HOSE



Available in ID –
1/2

X'el 1SC COMPACT HOSE
WITH ONE WIRE BRAID



Available in ID –
1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1

X'el N2
WITH TWO WIRE BRAIDS



Available in ID –
1/4, 3/8, 1/2, 3/4, 1, 1-1/4, 1-1/2 & 2

ROCK DRILL HOSE
WITH ONE WIRE BRAID



Available in ID –
1/2, 5/8, 3/4, 1, 1-1/4, 1-1/2 & 2

X'el 2SC COMPACT HOSE
WITH TWO WIRE BRAIDS



Available in ID –
1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1