

M3500A Specifications

DC Characteristics

Function	Range	Resolution	Input Resistance	1 year accuracy ± (% of reading + % of range) (23°C±5°C)
DCV (DC Voltage)	100.0000mV	0.1µV	>10GΩ	0.0050+0.0035
	1.000000V	1.0µV	>10GΩ	0.0040+0.0007
	10.00000V	10µV	>10GΩ	0.0035+0.0005
	100.0000V	100µV	10MΩ	0.0045+0.0006
	1000.000V	1mV	10MΩ	0.0045+0.0010

Frequency and Period

Function	Range	Frequency (Hz)	1 year accuracy ± (% of reading + % of range) (23°C±5°C)
Frequency & Period	100mV to 750V	3-5	0.10
		5-10	0.05
		10-40	0.03
		40-300K	0.01

AC Characteristics

Function	Range	Resolution	Frequency (Hz)	1 year accuracy ± (% of reading + % of range) (23°C±5°C)
ACV (AC True RMS Voltage)	100.0000 mV to 750.000V	0.1µV to 1mV	3-5	1.00+0.04
			5-10	0.35+0.04
			10-20K	0.06+0.04
			20K-50K	0.12+0.05
			50K-100K	0.60+0.08
	100K-300K	4.00+0.50		
ACI (AC True RMS Current)	1.000000A to 3.00000A	1µA to 10µA	3-5	1.00+0.03
			5-10	0.35+0.03
			10-20K	0.06+0.03
			20K-50K	0.12+0.05
			50K-100K	0.60+0.08
	100K-300K	4.00+0.50		

Function	Range	Resolution	Shunt Resistance	1 year accuracy ± (% of reading + % of range) (23°C±5°C)
DCI (DC Current)	10.00000mA	10nA	5.1Ω	0.050+0.020
	100.0000mA	100nA	5.1Ω	0.050+0.005
	1.000000A	1µA	0.1Ω	0.100+0.010
	3.00000A	10µA	0.1Ω	0.120+0.020

Function	Range	Resolution	Test Current	1 year accuracy ± (% of reading + % of range) (23°C±5°C)
Resistance (Specifications are for 4W or 2W when a NULL operation is used.)	100.0000Ω	100µΩ	1mA	0.010+0.004
	1.000000KΩ	1mΩ	1mA	0.010+0.001
	10.00000KΩ	10mΩ	100µA	0.010+0.001
	100.0000KΩ	100mΩ	10µA	0.010+0.001
	1.000000MΩ	1Ω	5µA	0.010+0.001
	10.00000MΩ	10Ω	500nA	0.040+0.001
	100.0000MΩ	100Ω	500nA/10MΩ	0.800+0.010
Diode Test	1.00000V	10µV	1mA	0.010+0.020
Continuity	1000.00Ω	10mΩ	1mA	0.010+0.030

Dimension & Weight	85(H)x210(W)x350(D)mm. Approx. 4.36kg
--------------------	--

Accessories Included:

- Standard:
 - CD (user manual and software application), power cord, test leads, and USB cable.
- Options:
 - M3500-opt01: Multi-Point Scanner Card
 - M3500-opt02: Thermocouple Adapter
 - M3500-opt03: BNC to Banana Adapter
 - M3500-opt04: GPIB Card
 - M3500-opt05: RTD Probe Adapter
 - M3500-opt06: RS-232 Card
 - M3500-opt07: Kelvin Probe
 - M3500-opt08: 4-Wire Test Leads

Marketed & Supported By

Salicon Nano Technology Pvt. Ltd.

111, 1st Laxmi Deep Tower, Laxmi Nagar District Center,
Delhi - 110092, INDIA,
Tel: 91-11-22525940, 40618940; Fax: 91-11-22525941; E-mail: info@salicontech.com; Web: www.salicontech.com



Specifications are subject to change without notice due to design improvement.

Printed Date: 2008/04



M3500A

6.5 Digital Multimeter

Speed
Stability
Accuracy
Noise Immunity



<http://www.picotest.com.tw>




PICOTEST®

M3500A


Stability, Speed & Accuracy

The 6.5 digit M3500A DMM is designed by 7.5 digit techniques and provides users a stable, fast and accurate measurement. The following figure is a stability performance comparison between a typical 6.5 digit DMM and the M3500A.

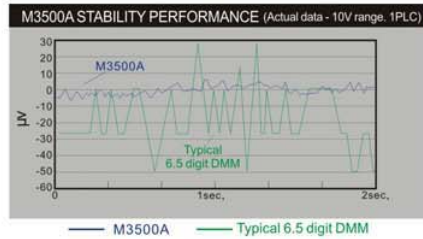

Multi-Point SCAN

The M3500A supports up to 10 channels (2-pole) multi-point scan. For using this option, users need a multi-point scanner card (M3500-opt01). The installation of the multi-point scanner card is very easy - just turn off the M3500A and plug in a multi-point scanner card, and it is done!



Noise Immunity

The M3500A has an excellent performance on noise immunity. The core of this DMM is a powerful multi-slope analog to digital converter (A/D converter), which helps the DMM to reach high-speed sampling rate, filters out most noise, and keeps a good measurement linearity still. In addition, to reduce the environmental background noise, four sets of earth ground are added on the meter's front panel. And the copper conductors inside the meter also reduce the thermal EMFs.

Built-in USB Interface

The M3500A is equipped with a standard USB interface. This easy to use and hot plug-in USB interface supports a data transfer rate over 2000 readings per second. It allows the DMM to reach a truly high speed, both internal sampling rate, I/O data rate, and increase the measurement speed.

Support USBTMC

USBTMC stands for USB Test & Measurement Class. Any USB device conforms to USBTMC without the limitations of operation systems and environment can work under VISA assistance, and communicate with a computer. In other words, the control procedures via VISA to USBTMC device and via VISA to GPIB device are the same.



Displays with 3 Colors

The VFD dual displays with 5x7 dot matrix, and three-color annunciators are adopted on the M3500A. Users can easily distinguish each symbols by colors.



Free Remote-Control Software:

The Remote-Control Software, PT-TOOL & PT-LINK, is free and easy for users' application. PT-TOOL is a stand-alone software which can imitate virtual M3500A operations on the PC, and allow users to transmit data in Excel format. In addition, PT-LINK under the Microsoft Word® & Excel® application provides users a simple function of getting values and diagrams.

High Speed: 2000 Rds/Sec


The M3500A is engineered with expertise to reach such a high performance: Both of the sampling rate and the data transfer rate can achieve 2000 readings per second.

19 Full-Featured Functions

There are 11 measurements and 8 math functions: DCI, DCV, ACI, ACV, 2WΩ, 4WΩ, Frequency, Period, Diode, Continuity, Temperature: Limits, Ratio, MX+B, %, dBm, dB, Min/Max, Null. In addition, Trigger and Memory functions are also involved.

Temperature Measurements

Our thermal measurement functions support two types of measurements: Thermocouples and RTDs. For thermocouples, we support up to seven types of sensors: E, J, K, N, R, S, and T, using a NIST Monograph 175 reference table. Moreover, for the RTD temperature conversions, we adopt three types of standard: ITS-90, IEC751 and Callendar-Van Dusen standard in our thermal measurement functions. All these are made for users' convenience.

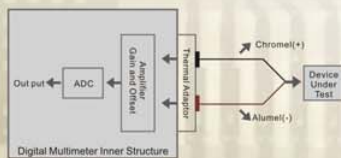

K-Type Thermocouple Temperature Measurement

